BRUHAT BANGALORE MAHANAGARA PALIKE

YELAHANKA ZONE

Name of the work: **Estimate for Improvements and Asphalting to Roads at Canara Bank Layout in ward No. 09 in Vidyaranyapura sub Division.**

									Estimate Cost:	**4900000.00**
Sl. No	Description	Unit	No.	L	B	D	Qty	Rate	Amount
1	KSRRB 300-1. Earth work excavation by manual means in ordinary soil involving an average horizontal throw upto 2 meters and an average lift upto 0.5m, excavated surface leveled and sides neatly dressed, the disposed earth to be leveled neatly after breaking of clods complete as per specifications complete as per specifications MORTH chapter 3. **Page No. 138 / Item No. 19.1/ PWD SR 2014-15**	Cum							
	Drain Desilting								
			2	200.00	0.45	0.35	63.00		
			3x2	45.00	0.45	0.35	42.53		
			2	50.00	0.45	0.30	13.50		
			2	75.00	0.45	0.35	23.63		
			2	290.00	0.45	0.35	91.35		
	Berm Cutting								
			2	200.00	1.20	0.20	96.00		
			3x2	45.00	1.20	0.20	194.40	64.80	
			2	50.00	1.20	0.20	24.00		
			2	75.00	1.20	0.20	36.00		
			2	290.00	2.10	0.30	365.40		
	RCC Drain		1	75.00	1.00	1.00	75.00		
							1024.80	75.60	**77475.00**
	Basic Rate	70.00					89524		
	Area Weightage @8%	5.60							
	Total	**75.60**							
2	Removing B.S Slab of Drain and stacking **Page No. 25 / Item No. 5.32 / PWD SR 2014-15**	Sqm							
	Srinidhi layiut 8th A Cross		2	200.00		1.35	540.00		
			3x2	45.00		1.35	364.50		
			2	50.00		1.35	135.00		
			2	75.00		1.35	202.50		
			2	75.00		1.35	202.50		
			2	290.00		1.35	783.00		
							2227.50	58.32	**129908.00**
	Basic Rate	54.00							
	Area Weightage @ 8%	4.32							
	Total	**58.32**							
3	Refixing stone slabs of drains and pointing in C.M (1:3) **Page No. 25 / Item No. 5.33 / PWD SR 2014-15**	Sqm							
			Qty Vide Item No. 2				**2227.50**	75.60	**168399.00**
	Basic Rate	70.00							
	Area Weightage @ 8%	5.60							
	Total	**75.60**							

4	KSRB 4-1.3 : Providing and laying in position plain cement concrete of **mix 1:4:8 with OPC cement @ 180 kgs with 40mm** and down size graded granite metal coarse aggregates @ 0.85cum and fine aggregares @ 0.57 cum machine mixed, concrete laid in layers not, exceeding 15cms, thick, well compacted, in foundation and plinth, including cost of all materials, labour, HOM of machinery, curing complete as per specifications. Specification No. KBS 4.1,4.2. **No. 12/ Item No. 4.3/ PWD SR 2014-15**	Cum							
			2x2	175.00	0.30	0.10	21.00		
	RCC Drain		1	75.00	0.90	0.15	10.13		
							31.13	4847.04	**150864.00**
	Basic Rate	4488.00							
	Area Weightage @ 8%	359.04							
	Total	**4847.04**							
5	KSRB 5-14 : Providing and constructing precast concrete solid blocks with compressive strength not les than 35 Kg/sqm with cement mortar 1:4 masonry (quoin, Jamb, closer blocks) with solid concrete blocks of size 40x20x20 cms conforming to I.S: 2185/1965 in superstructure including cost of materials, labour charges, scaffolding, curing complete as per specifications. **Page No. 25 / Item No. 5.27 / PWD SR 2014-15**	Sqm							
			2x2	175.00		0.20	140.00		
							140.00	993.60	**139104.00**
	Basic Rate	920.00							
	Area Weightage @ 8%	73.60							
	Total	**993.60**							
6	KSRB 4-1.6 : Providing and laying in position plain cement concrete of **mix 1:2:4 with cement @ 240 kgs with 20mm** and down size graded granite metal coarse aggregates @ 0.878 cum and fine aggregates @ 0.459 cum, machine mixed, concrete laid in layers not exceeding 15cms, thick, well compacted, in foundation, plinth and cills, including cost of all materials, labour, HOM of machinery, curing complete as per specifications, specification. No. KBS 4.1,4.2. **No. 12/ Item No. 4.6/ PWD SR 2014-15**	Cum							
	Coping		2x2	175.00	0.20	0.10	14.00		
	Bottom		2	175.00	0.45	0.10	15.75		
							29.75	5327.64	**158497.00**
	Basic Rate	4933.00							
	Area Weightage @ 8%	394.64							
	Total	**5327.64**							

7	KSRB 4.2.2 : Providing and laying in position **reinforced cement concrete of design mix M20 with OPC cement @ 320 kgs, with 20mm and down size graded granite metal**, coarse aggregates @ 0.878 cum and fine aggregates @ 0.459 cum with superplastisiser @ 3lts confirming to IS 9103-1999 reaffirmed-2008 machine mixed, concrete laid in layers not exceeding 15cms thick, vibrated for all works in foundation plinth and ground floor level for roof slabs, staircase, lintels, retaining walls, walls (any thickness) including attached plasters, column, piers, abutments, pillars, posts, struts, buttresses, string or lacing courses, parapets, coping, bed blocks, anchor blocks, plain window cills, fillets etc, including cost of all materials, labour, HOM of machinery, curing, complete as per specifications. Specification No. KBS 4.1,4.6, **Page No. 13 / Item No. 4.11 / PWD SR 2014-15**	Cum							
			2	175.00	0.90	0.10	31.50		
	RCC Drain Bottom		1	75.00	0.90	0.15	10.13		
			2	75.00	0.15	0.75	16.88		
							58.50	6065.28	**354819.00**
	Basic Rate	5616.00							
	Area Weightage @ 8%	449.28							
	Total	**6065.28**							
8	KSRB 4.9.2: Providing T.M.T steel reinforcement for R.C.C work including straightening, cutting, bending, hooking, placing in position, lapping and / or welding wherever required, tying with binding wire and anchoring to the adjoining members wherever necessary complete as per design (laps, hooks and wastage shall not be measured and paid) cost of materials, labour, HOM of machinery complete as per specifications. Specification No. KBS 4.6.3 **TMT Bars FE 500 Page No. 17 / Item No. 4.46.2 / PWD SR 2014-15**	Tonne							
			0.05	58.50			2.93		
							2.93	78351.84	**229179.00**
	Basic Rate	72548.00							
	Area Weightage @ 8%	5803.84							
	Total	**78351.84**							
9	KSRB 4-6.2 : Providing and removing centering, shuttering, strutting, propping etc., and **removal of form work for flat surface such as suspended floors, roofs, landings, balconies and likes, thickness upto 200 mm** including cost of all materials, labour complete as per specifications. Specification NO KBS 4.6.2 **Page No. 15 / Item No. 4.18 / PWD SR 2014-15**	Sqm							
			2	175.00	0.60		210.00		

			3	165.00		0.15	74.25		
	RCC Drain Sidewall		4	75.00		0.75	225.00		
	Basic Rate	291.00					**509.25**	314.28	**160047.00**
	Area Weightage @ 8%	23.28							
	Total	**314.28**							
10	KSRRB 300-47: scarifying kankar/gravel/metal crust upto 150mm thick with pick axes and disposal of stuff within a lead of 100 meters including cost of all labour charges complete as per specifications MORTH chapter 3, **No. 143 / Item No. 19.53 / PWD SR 2014-15**	Sqm							
			2	200.00	1.50		600.00		
			3	45.00	5.50		742.50		
			2	50.00	1.50		150.00		
			2	75.00	1.50		225.00		
			2	290.00	1.50		870.00		
							2587.50	22.68	**58685.00**
	Basic Rate	21.00							
	Area Weightage @ 8%	1.68							
	Total	**22.68**							
11	Providing, laying, spreading and compacting graded stone aggregate to **wet mix macadam** specification including premixing the Material with water at OMC in mechanical mix plant carriage of mixed Material by tipper to site, laying in uniform layers with paver in sub-base / base course on well prepared surface and compacting with vibratory roller to achieve the desired density complete as per specifications **Page No. 154 / Item No. 20.18 PWD SR - 2014-15**	Cum							
			2	200.00	1.50	0.20	120.00		
			3	45.00	5.50	0.20	148.50		
			2	50.00	1.50	0.15	22.50		
			2	75.00	1.50	0.15	33.75		
			2	290.00	1.75	0.20	203.00		
							527.75		
	Road Cut Portion @ 15%						79.16		
	Pot Hole Filling		40	3.00	2.00	0.15	36.00		
	Road Cutting		22	6.00	1.00	0.15	19.80		
							662.71	1438.56	**953352.00**
	Basic Rate	1332.00							
	Area Weightage @ 8%	106.56							
	Total	**1438.56**							
12	Providing and applying primer coat with S.S. bitumen emulsion on prepared surface of granular base such as WBM, WMM including cleaning of road surface and spraying primer at the rate of 0.60 Kg / sqm using mechnical means complete as per specifications. MORTH specification NO. 502, **Page No. 157 / Item No. 21.6 / PWD SR 2014-15**	Sqm							
			1	200.00	5.50		1100.00		
			3	45.00	5.50		742.50		

			1	50.00	5.50		275.00		
			1	75.00	5.50		412.50		
			1	290.00	7.50		2175.00		
							4705.00	31.32	**147361.00**
	asper Revised Basic Rate	29.00							
	Area Weightage @ 8%	2.32							
	Total	**31.32**							
13	KSRRB 500-11: Providing and laying **bituminous macadam** on prepared surface with crushed coarse aggregates as per design mix formula for base / binding course including loading of aggregates with F.E. loader, hot mixing of stone aggregates and bitumen in hot mix plant 40 tonne capacity, transporting the mixed material in tipper to paver and laying mixed materials with paver finisher to the required level and grade, rolling by power roller to achieve the desired density, 50 / 75mm compacted thickness with 3.3% bitumen but excluding cost of primer / tack cost with lead upto 1km including cost of all materials, labour, HOM of machineries complete as per specifications. MORTH chapter 5, **using 100/12 TPH capacity h.M.P with sensor paver gr-II (50 mm to 75 mm) with 3.3 % VG-30 Bitumen, Page No. 158 / Item No. 21.11.2/ PWD SR 2014-15**	Cum							
			1	200.00	5.50	0.050	55.00		
			1	290.00	7.50	0.050	108.75		
							163.75		
	Consider Pot Hole, Road Cutting and Depression Filling @ 25%						40.94		
							40.94	6716.52	**274958.00**
	as per Revised Basic Rate	6219.00							
	Area Weightage @ 8%	497.52							
	Total	**6716.52**							
14	KSRRB M500-19: Providing and laying **bituminous concrete** crushed aggregates of specified grading, premixed with bituminous binder at 5.4 to 5.6% of mix and filler, transporting the hot mix to work site, laying with a hydrostatic paver finisher with sensor control to the required grad, level and alignment, rolling with smooth wheeled, vibratory and tandem rollers to achieve, the desired compaction as per MORTH specification clauses No. 500.9 complete in all respects complete as pr specifications. **Using 100/120 TPH capacity H.M.P with sensor paver Gr-II (30 mm to 45 mm) with 6 % CRMB 55 Page No. 151 / Item No. 21.23 / PWD SR 2014-15**	Cum							
			1	200.00	5.50	0.040	44.00		
			1	290.00	7.50	0.040	87.00		
							131.00	10288.08	**1347738.00**
	as per Revised Basic Rate	9526.00							

	Area Weightage @ 8%	762.08							
	Total	**10288.08**							
15	KSRRB M500-18: Providing and laying **semi dense bituminous concrete** using crushed aggregates of specified grading, premixed with bituminous binder and filler, transporting the hot mix to work site, laying with a hydrostatic paver finisher with sensor control to the required grade, level and alignment, rolling with smooth wheeled, vibratory and tandem roller to achieve the desired compaction as per MORTH specifications clause No. 500.8 complete in all respects as per specifications. **with 100-120 TPH capacityH.M.P with sensor paver Gr-II (25 mm to 30 mm) with 5 % VG-30 Bitumen Page No. 159 / Item No. 21.20.2 / PWD SR 2014-15**	Cum							
			3	45.00	5.50	0.025	18.56		
			1	50.00	5.50	0.025	6.88		
			1	75.00	5.50	0.025	10.31		
							35.75	8475.84	**303011.00**
	as per Revised Basic Rate	7848.00							
	Area Weightage @ 8%	627.84							
	Total	**8475.84**							
16	KSRRB 3000 **Filling Pot-holes and patch repairs with bituminous concrete, 40 mm,** KSRRB M3000-5, Removal of all failed material, trimming of completed excavation to provide firm vertical faces, cleaning of surface, painting of tack coat on the sides and base of excavation as per clause 500.3 finishing the surface to form a smooth continuous surface, all as per clause 3004.2 complete as per specifications, MORTH specification No. 3004.2, **No. 247 / Item No. 35.5 PWD SR 2014-15**	Sqm							
	Pot Hole Filling		40	3.00	2.00		240.00		
	Road Cutting		22	6.00	1.00		132.00		
							372.00	369.36	**137402.00**
	Basic Rate	342.00							
	Area Weightage @ 8%	27.36							
	Total	**369.36**							
17	Lead for Disposal of Debris shall be payable at carriage rates by Mechanical means inlcuding loading and unloading. From 0.00 to 2.00 Km (Page No.123)	Cum							
			Vide Item No. 1				**819.84**	73.57	**60315.00**

(6)

Sl. No	Description	Unit	No.	L	B	D	Qty	Rate	Amount
	Average weight of earth 1.28 tonne / kg for 2x1.28x2.00=5.12	5.12							
	Add loading and unloading charges Vide item no.17.1 P.no.130	63.00							
		68.12							
	Area Weightage @ 8%	5.45							
	Total	**73.57**							
18	Sub Total								**4848918.00**
19	For Third Part QC inspection Charges @ 1% of Estimate Cost								**48489.00**
20	Miscellaneous and other Charges	L/S							**2593.00**
								Rs. **Total**	**4900000.00**
	(Rupees Fourty Nine Lakhs)								

CERTIFICATE:

1 The work spot has been inspected and the work is found necessary.
2 This estimate is prepared as per PWD SR of 2014-15.
3 The provisions were made in this estimate are necessary and adequate.
4 This works come under B.B.M.P. limits.

Assistant Engineer
W.S

Assistant Executive Engineer
Bruhat Bangalore Mahanagara Palike
Vidayranyapura Sub Division

Executive Engineer
Bruhat Bangalore Mahanagara Palike
Byatarayanapura Division

ADMINISTRATIVELY SANCTIONED FOR Rs 49.00 lakhs
Rupees Fourty Nine lakhs only
Under P. 3089
Registered as EE ( ) No 3 ...9...
Subject to conditions contained in
enclosed memo EE ( ) No /91...
Dt Estimate A/C sanctioned
JC(W)/BA/15 No 29/2015-16
dated 20/8/2015 Rs 49.00 lakhs

Joint Commissioner
(Yelahanka Zone)
BBMP, Bengaluru-92

Technical Sanction
Accorded ... 49.00 lakh Rs
Head of A/C ... P 3089
CER NO : 44 Dt:.. 21.8.15

TA CE (YNK)

(5)

BRUHAT BANGALORE MAHANAGARA PALIKE

YELAHANKA ZONE, BYATARAYANAPURA DIVISION

Lead Statement for Srinivaspura Dumping Yard for Ward No. 09,
Vidyaranyapura Sub Division.

Lead Distance

1.	From BBMP Sub Division office to Devi Circle	1.50 Kms
2.	From Devi Circle to Thirumala Daba	2.00 Kms
3.	From Thirumala Daba to 3rd Cross SBI Bank	2.00 Kms
4.	From 3rd Cross SBI Bank to Sheshadripuram College	0.50 Kms
5.	From Shesadripuram College to Police Station	0.80 Kms
6.	From Police Station to Kogilu Cross	0.60 Kms
7.	From Kogilu Cross to Srinivasapura	4.00 Kms
8.	From Srinivasapura to Dumping Yard	0.50 Kms
	Total	**11.90 Kms**

Certificate:

1. Certified that the Srinivasapura Dumping Yard us the approved dumping yard for ward no. 09 BBMP
2. BBMP Sub Division office Vidyaranyapura is taken as the centre place for calculating the lead distance for ward no. 09.
3. The above distance is the shortest distance for calculating the lead.

Assistant Engineer Ward No. 09	Assistant Executive Engineer Vidyaranyapura Sub Division	Executive Engineer Byatarayanapura Division

LOAD CHART FOR DUMPING-YARD FOR WARD NO

(2)

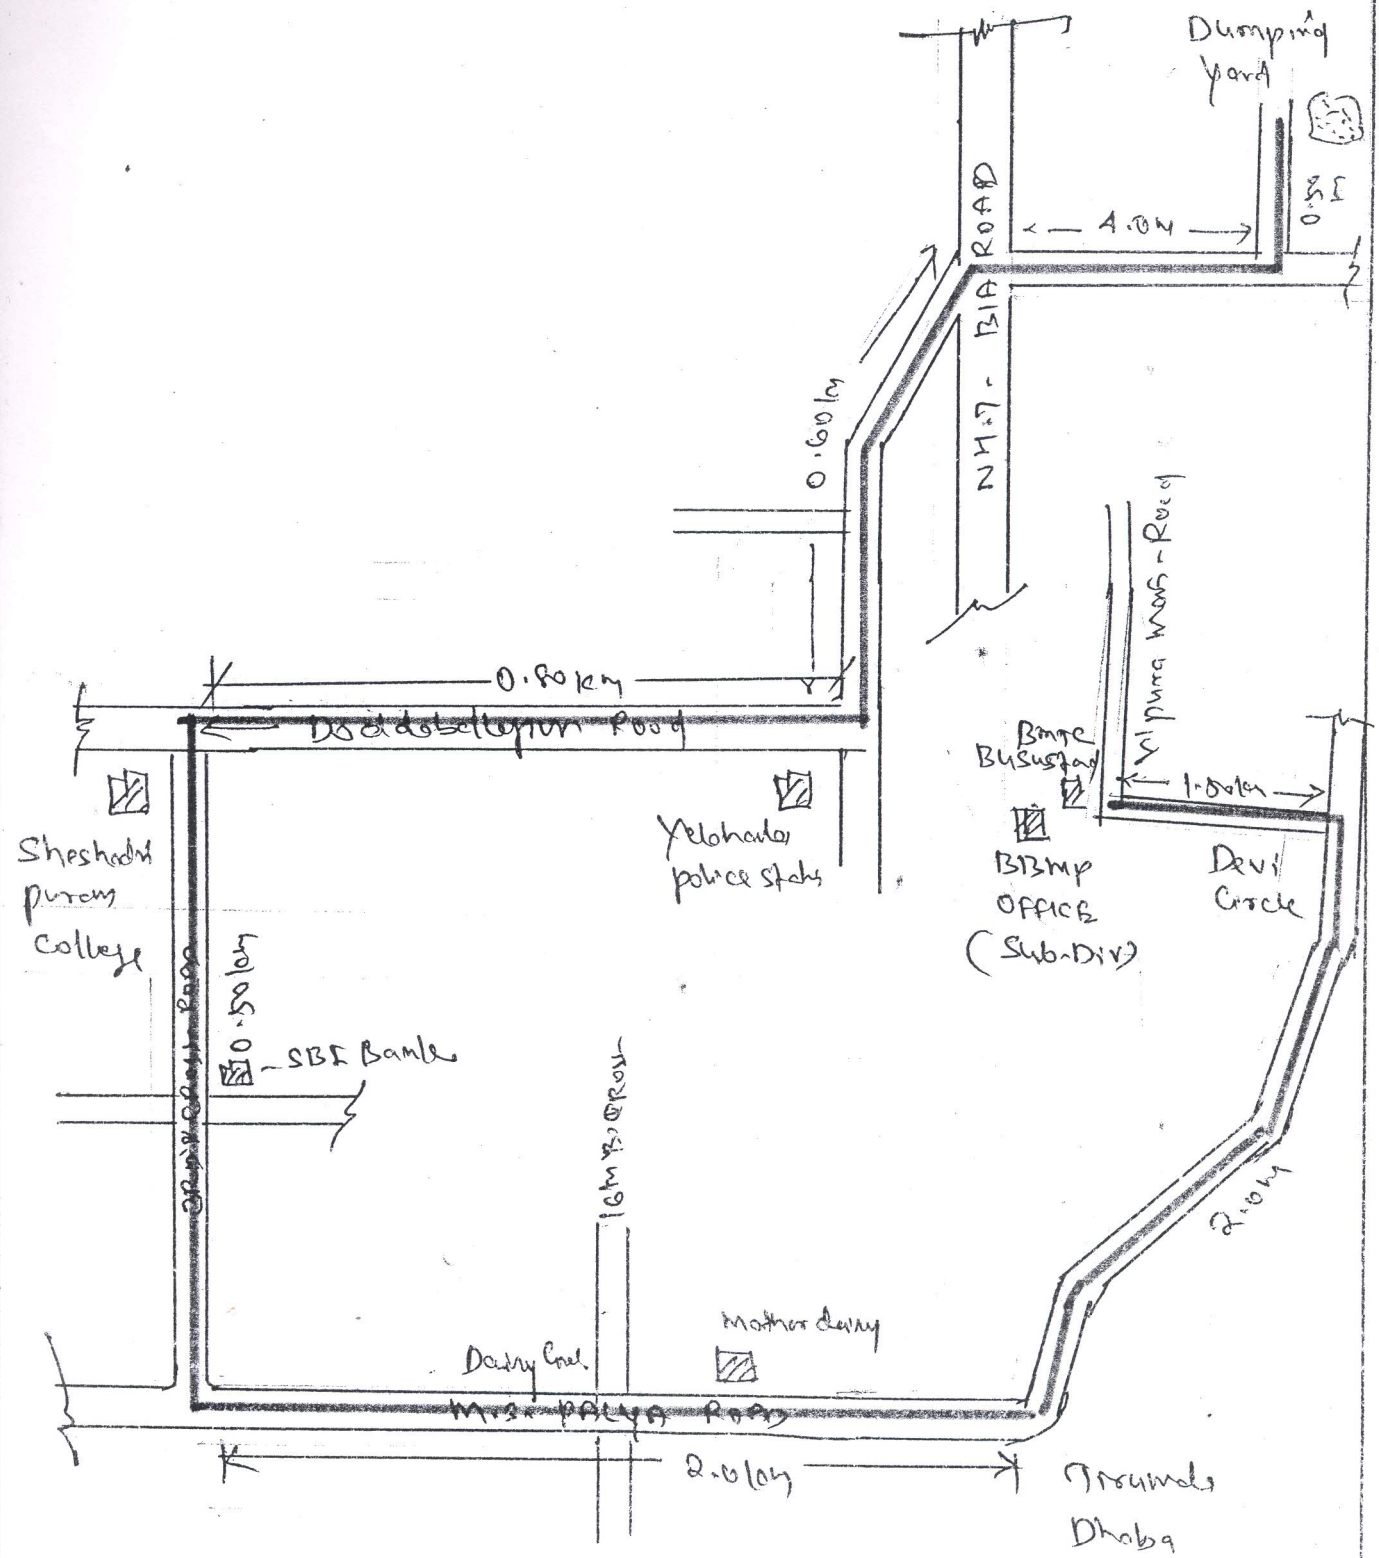

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ವಿದ್ಯಾರಣ್ಯಪುರ ಉಪ ವಿಭಾಗ
ಯಲಹಂಕ ವಲಯ.
ಬೃ. ಬೆಂ. ಮ. ಪಾ., ಬೆಂಗಳೂರು-97